

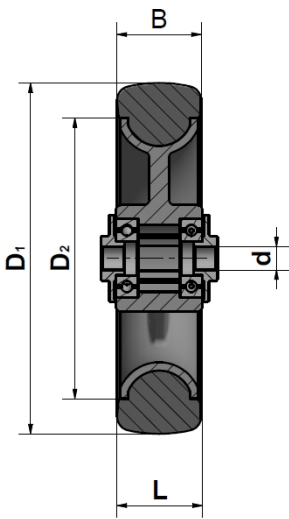






## X0305



Art.-No.	 Diameter D1	 Diameter D2	 Tyre width B	 Hub length L	 Axial dimension d	Tyre tread	Fastener	 Load capacity	Ball bearing
X0305-100/125/30	125 mm	100 mm	30 mm	31 mm	8 mm	smooth, flat	---	50 kg	X
X0305-100/125/30	125 mm	100 mm	30 mm	31 mm	10 mm	smooth, flat	---	50 kg	X
X0305-100/125/30	125 mm	100 mm	30 mm	31 mm	12 mm	smooth, flat	---	50 kg	X
X0305-125/150/30	150 mm	125 mm	30 mm	31 mm	8 mm	smooth, flat	---	50 kg	X
X0305-125/150/30	150 mm	125 mm	30 mm	31 mm	10 mm	smooth, flat	---	50 kg	X
X0305-125/150/30	150 mm	125 mm	30 mm	31 mm	12 mm	smooth, flat	---	50 kg	X
X0305-136/154/32	154 mm	136 mm	32 mm	31 mm	8 mm	smooth, flat	---	50 kg	X
X0305-136/154/32	154 mm	136 mm	32 mm	31 mm	10 mm	smooth, flat	---	50 kg	X
X0305-136/154/32	154 mm	136 mm	32 mm	31 mm	12 mm	smooth, flat	---	50 kg	X
X0305-175/200/30	200 mm	175 mm	30 mm	31 mm	8 mm	smooth, flat	---	50 kg	X
X0305-175/200/30	200 mm	175 mm	30 mm	31 mm	10 mm	smooth, flat	---	50 kg	X
X0305-175/200/30	200 mm	175 mm	30 mm	31 mm	12 mm	smooth, flat	---	50 kg	X

**Colour - rim:** black or grey (standard), special colours on request.

**Colour - tyre:** black (standard), special colours on request.

**Colour - fastener:** black (standard), special colours on request.

**Material - rim:** PA (15% glas fiber) or PP

**Material - tyre:** **TPU** (75 Shore) / **TPE** (45 Shore) / **EVA** (except X0305-125/150/30 & X0305-136/154/32)

**Material - fastener:** PP

### Optional:



Steering fork 125x42

for wheel X0305-100/125/30



Steering fork 150x42

for wheel X0305-125/150/30  
for wheel X0305-136/154/32



Steering fork 200x42

for wheel X0305-175/200/30

### Typical assembly:

